




Product support available at support.gomEDIATECH.com

The Mediatech ButtonMate 52, is a configurable room control panel capable of directly controlling RS-232, IR and Contact Closure controlled devices such as A/V switchers, projectors, VCR/DVD players, document cameras, etc. This controller may be used for direct control of 4 IR devices (using 2 dual head emitters), two relay controlled devices, and 2 RS-232 devices. It may also be used in combination with any of Mediatech's other control products for even greater control capability. Typical applications include classrooms, courtrooms, houses of worship, and board rooms. The ButtonMate 52 provides a customizable and consistent look and feel control interface to instructors and presenters regardless of the make and model of the equipment being controlled.

Warranty: 3 Years Parts & Labor

Weight: 4 oz Dimensions: 4.5"H x 4.5"W


Additional options include: custom top panel screening / color, volume control knob, custom wood housing, dual-head IR emitters, or additional serial cables. Contact Mediatech directly for more information.



Customizable button labels and colors, enable a consistent look & feel control interface for instructors and presenters.

ButtonMate 52

MT-52-BM

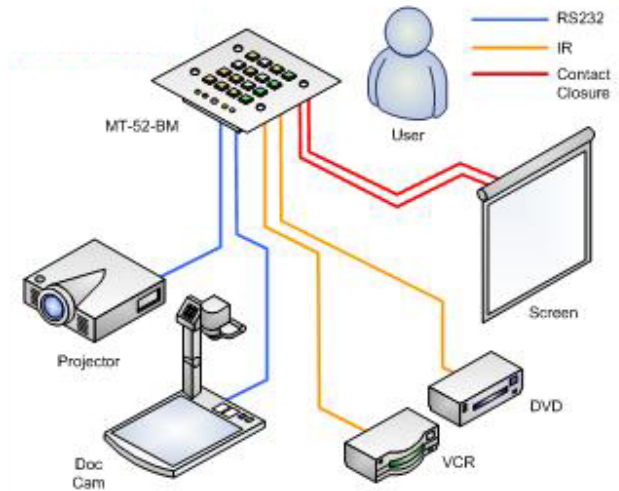

A wall, lectern, or cart-mounted ButtonMate E22 can directly control an audio/visual equipment suite as shown in the sample application.

Standard features include:

- MS Windows®-Based Software Utility for Easy Setup
- Built-In IR Learner with 60 Internal Command Storage Locations
- Non-Volatile Storage for Settings or Commands
- 182 X 128 byte Configurable Command Functions
- 4 Sources x 12 Functions = 52 Distinct Button Functions
- Auto-Execute & Auto-Power-Up Functions
- Robust Configurable Functionality
- Multiple, Mixed Command Sequences
- Programmable Delays
- Toggling Command Functions (different commands for Odd/Even button presses or for button press and release)
- (2) Bidirectional Serial Control Ports
- (2) Relay Control Ports (Normally Open Standard)
- (2) IR Control Ports (can support dual head emitters)
- Expandable for adding up to 4 additional sources x 12 functions for possible total of 8 sources x 24 functions each
- Backlit Buttons with Illumination Completely Under User Control
- Front Panel Operational Status Lights
- User Controllable Audible Feedback